



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-1001: U1W Poli-Glide 3M/2U/BU

Color: White

Plies: 1

Nom. OAG: 0.03" +/- 0.01"

Fabric: Monofilament/Polyester

Top Surface: Smooth Cover

Bottom Surface: Bare

Compound: Poly Urethane

Work Tension: 30 lbs./PIW

Elongation: Less than 1%

Weight: 0.02 lbs./PIW

Minimum Pulley: 0.1"

Backflex Min. Pulley Dia.: 0.2"


Working Temp. (F): -4 to 180

Max. Stocked Width: 78.75"

Attributes: Cross Rigid, Nosebar
Suitable, Anti-Static, Abrasion Resistant,
Oil Resistant, FDA Compliant

Hardness: 90a

Features: This belt is a lightweight 1 ply monofilament construction that will negotiate small pulleys. The urethane compound is oil, animal fat and grease resistant. It is easy to clean and will lay flat. Refer to the chemical resistance chart when choosing a cleaning solution. This belt is anti-static. U1W Poli-Glide is used in candy, chocolate and confectionery processing. It is also used in many medium food processing applications such as the cheese, bakery, fish, meat, poultry and vegetable industries.

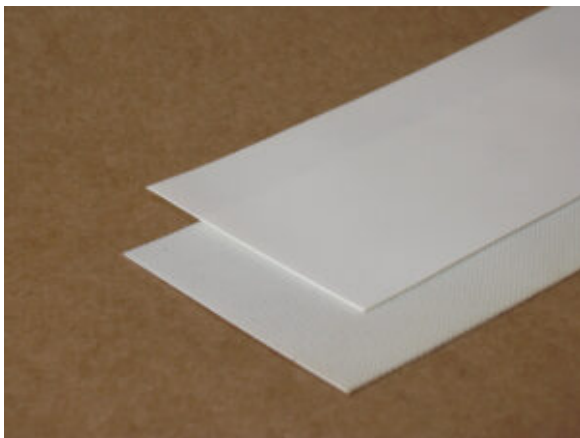



Splicing Instructions


Part Number: 1-1001

Part Description: U1W Poli-Glide 3M/2U/BU



Belt

Spec

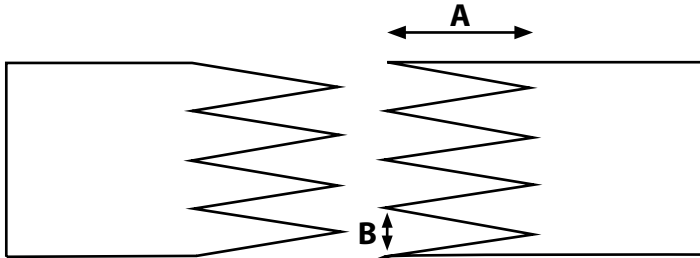

Finger Length (A):

Finger Width (B):

Imperial	Metric
12"	305 mm
7"	178 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

Imperial	Metric	Imperial	Metric
100 ° F	38 ° C	120 ° F	49 ° C
200 ° F	93 ° C	210 ° F	99 ° C
500 PSI	34.5 bar	300 PSI	20.7 bar
10:00 m:s	10:00 m:s	15:00 m:s	15:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8440C
	Belt	1-1001
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	

test 3.3.25