



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-1250: U2BL Poli-Glide 8M/2U/BU

Color: Blue

Plies: 2

Nom. OAG: 0.05" +/- 0.01"

Fabric: Polyester

Top Surface: Smooth

Bottom Surface: Bare

Compound: Poly Urethane

Work Tension: 126 lbs./PIW

Elongation: Less than 1%

Weight: 0.026 lbs./PIW

Minimum Pulley: 0.6"

Backflex Min. Pulley Dia.: 1"


Working Temp. (F): -4 to 212

Max. Stocked Width: 78.75"

Attributes: Abrasion Resistant, FDA Compliant, Sliderbed Suitable, Anti-Static, Nosebar Suitable

Hardness: 90a

Features: 1-1250 is FDA compliant, has a non-adhesive cover, is abrasion resistant and has good edge wear. The unique blue color helps visibility on food inspection lines. U2BL Poli-Glide 8M/2U/BU is a good food application belt. It is used as an accumulation belt, a diverting belt, a dough belt and a general conveying belt in food applications.

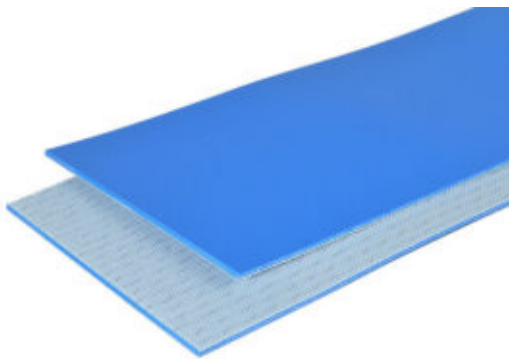




Splicing Instructions

Part Number: 1-1250

Part Description: U2BL Poli-Glide 8M/2U/BU

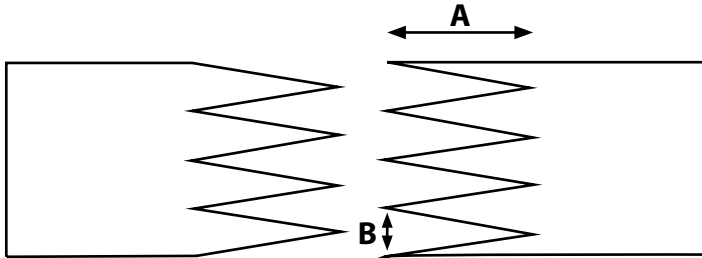

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	320 ° F	160 ° C	320 ° F	160 ° C
Bottom Platen Temp:	300 ° F	149 ° C	320 ° F	160 ° C
Pressure:	30 PSI	2.1 bar	36 PSI	2.5 bar
Time:	03:00 m:s	03:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Meltable Foil (optional)	8441C
	Belt	1-1250
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	