



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

1-2931: RAV3 W140 COS

Color: White

Plies: 3

Nom. OAG: 0.141" +/- 0.02"

Fabric: Polyester

Top Surface: Smooth Cover (Dull Finish)

Bottom Surface: Friction Surface

Compound: RAV

Work Tension: 150 lbs./PIW

Elongation: Less than 2%

Weight: 0.08 lbs./PIW

Minimum Pulley: 2.5"

Backflex Min. Pulley Dia.: 3.75"

Working Temp. (F): 20 to 180

Max. Stocked Width: 72"

Attributes: FDA Compliant, Oil Resistant,
Sliderbed Suitable

Features: 1-2931 features the popular RAV compound on a low stretch, stable polyester carcass. The RAV compound blends the economical benefits of PVC and the universal benefits of NBR. RAV3 W140 COS can be used anywhere an oil-resistant medium duty food belt is needed. It is a good belt for nut and seed sorting, meat and poultry applications and in vegetable and fruit processing.


Warning: Trying to access array
offset on value of type bool in
/home/mulhernbelting/public_html/staging.mulhernbelting.com/wp-
content/plugins/elementor-
pro/modules/dynamic-
tags/tags/post-featured-image.php
on line 39



Splicing Instructions

Part Number: 1-2931

Part Description: RAV3 W140 COS

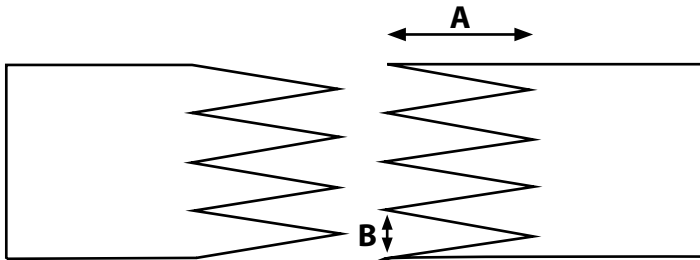

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Bottom Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Silicone Paper	1020C
	Melttable Foil (optional)	8340C
	Belt	1-2931
	Silicone Paper	1020C
	Molleton Cloth	1023
	Bottom Heating Platen with equalizing plate	