



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

2-1075: P2B Poli Quad-Q

Color: Black

Plies: 2

Nom. OAG: 0.075" +/- 0.015"

Fabric: Polyester

Top Surface: Quad Profile

Bottom Surface: Bare

Compound: PVC

Work Tension: 70 lbs./PIW

Elongation: Less than 2%

Weight: 0.035 lbs./PIW

Minimum Pulley: 0.8"

Backflex Min. Pulley Dia.: 1.6"

Working Temp. (F): -4 to 176

Max. Stocked Width: 72"

Hardness: 55a

Features: The P2B Poli Quad-Q features a soft PVC compound. It has a high grip/low friction surface. The 2-1075 is used for general conveying, sorting and for transfer applications.


Warning: Trying to access array
offset on value of type bool in
/home/mulhernbelting/public_html/staging.mulhernbelting.com/wp-
content/plugins/elementor-
pro/modules/dynamic-
tags/tags/post-featured-image.php
on line 39



Splicing Instructions

Part Number: 2-1075

Part Description: P2B Poli Quad-Q

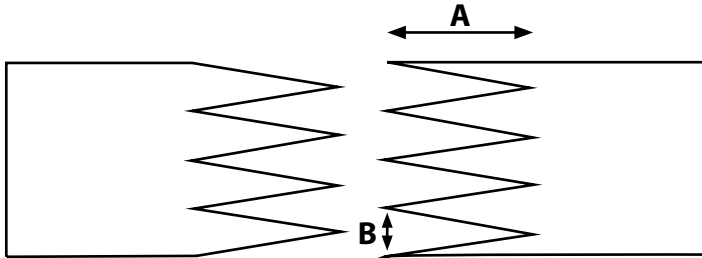

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Bottom Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8341C
	Belt	2-1075
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	