



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

## 2-1152: B1500 CBS

**Color:** Black

**Plies:** 1

**Nom. OAG:** 0.185" +/- 0.02"

**Fabric:** Interwoven Polyester

**Top Surface:** Smooth Cover

**Bottom Surface:** Smooth Cover

**Compound:** PVC

**Work Tension:** 150 lbs./PIW

**Elongation:** Less than 2%

**Weight:** 0.11 lbs./PIW

**Minimum Pulley:** 3"

**Backflex Min. Pulley Dia.:** 4.5"

**Working Temp. (F):** 0 to 180

**Max. Stocked Width:** 72"

**Top Cover Coefficient of Friction:** 0.83

**Bottom Cover Coefficient of Friction:**  
0.83

**Features:** 2-1152 features PVC covers on both sides. The tightly woven polyester resists fraying and is stretch resistant. B1500 CBS is popular in live roller applications as well as a light duty bucket elevator belt. It is popular in the peanut and coffee industry.


Warning: Trying to access array  
offset on value of type bool in  
/home/mulhernbelting/public\_html/staging.mulhernbelting.com/wp-  
content/plugins/elementor-  
pro/modules/dynamic-  
tags/tags/post-featured-image.php  
on line 39



# Splicing Instructions

**Part Number:** 2-1152

**Part Description:** B1500 CBS

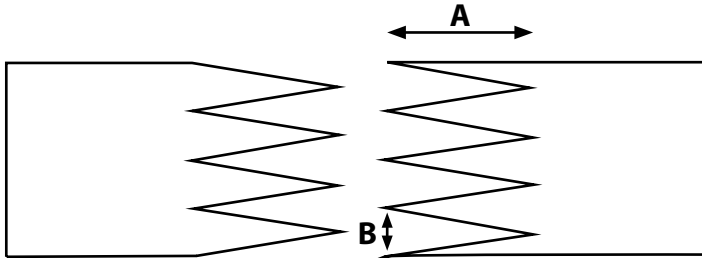

**Finger Length (A):**

**Finger Width (B):**

Imperial	Metric
3"	76 mm
3/4"	19 mm

## Water Cooled

## Hi-Speed

	Imperial	Metric	Imperial	Metric
<b>Upper Platen Temp:</b>	340 ° F	171 ° C	340 ° F	171 ° C
<b>Bottom Platen Temp:</b>	340 ° F	171 ° C	340 ° F	171 ° C
<b>Pressure:</b>	50 PSI	3.4 bar	36 PSI	2.5 bar
<b>Time:</b>	02:00 m:s	02:00 m:s	05:00 m:s	05:00 m:s

## Press Layout

## Description

## Part # to Order

	Top Heating Platen with equalizing plate	
	Teflon	6-3000
	Meltable Foil (optional)	8341C
	Belt	2-1152
	Meltable Foil (optional)	8341C
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.