



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

3-3612: B1200 Chevron Top

Color: Black

Plies: 1

Nom. OAG: 0.24" +/- 0.02"

Recessed OAG: 0.14"

Fabric: Interwoven Polyester

Top Surface: Chevron Impression

Bottom Surface: Brushed

Compound: PVC

Work Tension: 120 lbs./PIW

Elongation: Less than 2%

Weight: 0.085 lbs./PIW

Minimum Pulley: 2"

Backflex Min. Pulley Dia.: 3"

Working Temp. (F): 20 to 180

Max. Stocked Width: 72"

Attributes: Troughable, Sliderbed
Suitable

Top Cover Coefficient of Friction: 1.1

Bottom Cover Coefficient of Friction:
0.8

Features: 3-3612 features an interwoven carcass with an 1/8" high chevron impression. The belt has a brushed bottom cover for a low coefficient of friction. NOTE--The chevron impression must be recessed to use lacing. The OAG includes the profile. Use Recessed OAG for Lacing Recommendation. B1200 Chevron Top is very popular in the agricultural industry for the conveying of bulk materials.


Warning: Trying to access array
offset on value of type bool in
/home/mulhernbelting/public_html/staging.mulhernbelting.com/wp-
content/plugins/elementor-
pro/modules/dynamic-
tags/tags/post-featured-image.php
on line 39



Splicing Instructions

Part Number: 3-3612

Part Description: B1200 Chevron Top

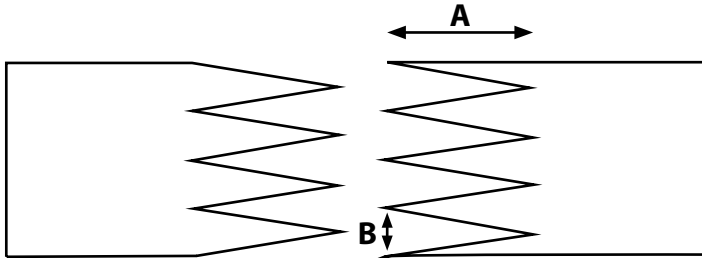

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Bottom Platen Temp:	340 ° F	171 ° C	340 ° F	171 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8341C
	Belt	3-3612
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

For high stress applications splice with reinforcing fabric.