(800) 253-6300
sales@mulhernbelting.com
www.mulhernbelting.com

3-3713: P2W Sawtooth x Bare MOR

Color: White
Plies: 2
Nom. OAG: 0.181" +/- 0.02"
Fabric: Polyester
Top Surface: Sawtooth
Bottom Surface: Bare
Compound: PVC
Elongation: Less than 2%
Weight: 0.075 lbs./PIW

Minimum Pulley: 3"
Backflex Min. Pulley Dia.: 4.5"
Working Temp: 14 to 194 °F
Max. Stocked Width: 78.75"
Attributes: FDA Compliant, Cross Rigid, Sliderbed Suitable, Oil Resistant
Hardness: 65a
Recessed OAG: 0.105"

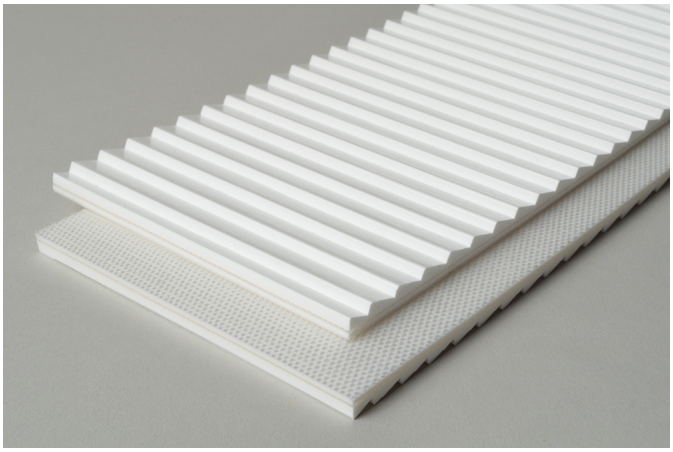

Splicing Instructions

Part Number: 3-3713 **Part Description:** P2W Sawtooth x Bare MOR

Belt Spec

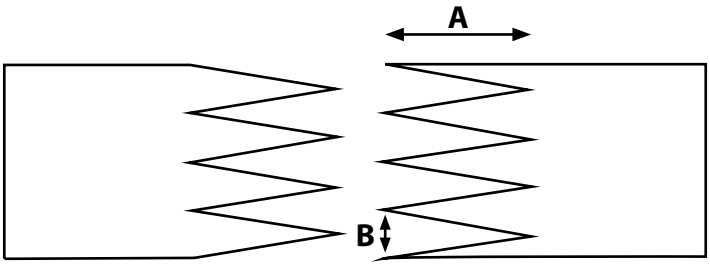

	Imperial	Metric
Finger Length (A):	3"	76 **mm**
Finger Width (B):	3/4"	19 **mm**

	Water Cooled		Hi-Speed	
	Imperial	**Metric**	**Imperial**	**Metric**
Upper Platen Temp:	340 ° **F**	171 ° **C**	330 ° **F**	166 ° **C**
Bottom Platen Temp:	340 ° **F**	171 ° **C**	330 ° **F**	166 ° **C**
Pressure:	50 **PSI**	3.4 **bar**	36 **PSI**	2.5 **bar**
Time:	01:00 **m:s**	01:00 **m:s**	03:00 **m:s**	03:00 **m:s**

Press Layout	Description	Part # to Order
	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8340C
	Belt	3-3713
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	

Ph: (800) 253-6300 Fax: (201) 337-6540 sales@mulhernbelting.com www.mulhernbelting.com