



(800) 253-6300

sales@mulhernbelting.com

www.mulhernbelting.com

3-3713: P2W Sawtooth x Bare MOR

Color: White

Plies: 2

Nom. OAG: 0.181" +/- 0.02"

Fabric: Polyester

Top Surface: Sawtooth

Bottom Surface: Bare

Compound: PVC

Elongation: Less than 2%

Weight: 0.075 lbs./PIW

Minimum Pulley: 3"

Backflex Min. Pulley Dia.: 4.5"

Working Temp. (F): 14 to 194

Max. Stocked Width: 78.75"

Attributes: FDA Compliant, Cross Rigid,
Sliderbed Suitable, Oil Resistant

Hardness: 65a






Splicing Instructions

Part Number: 3-3713

Part Description: P2W Sawtooth x Bare MOR

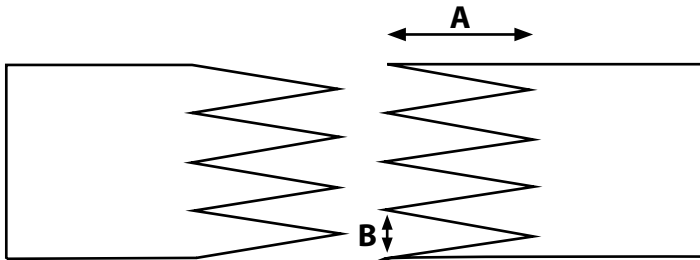

Finger Length (A):

Finger Width (B):

Imperial	Metric
3"	76 mm
3/4"	19 mm

Water Cooled

Hi-Speed

Upper Platen Temp:

Bottom Platen Temp:

Pressure:

Time:

	Imperial	Metric	Imperial	Metric
Upper Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Bottom Platen Temp:	340 ° F	171 ° C	330 ° F	166 ° C
Pressure:	50 PSI	3.4 bar	36 PSI	2.5 bar
Time:	01:00 m:s	01:00 m:s	03:00 m:s	03:00 m:s

Press Layout

Description

Part # to Order

	Top Heating Platen with equalizing plate	
	Impression Pad	
	Meltable Foil (optional)	8340C
	Belt	3-3713
	Teflon	6-3000
	Bottom Heating Platen with equalizing plate	