MULHERN BELTING, INC.

(800) 253-6300
sales@mulhernbelting.com
www.mulhernbelting.com

4-3004: 4 Ply Tan Transmission HD

Color: Tan
Plies: 4
Nom. OAG: 0.21" +/- 0.02"
Fabric: Cotton
Top Surface: Friction Surface
Bottom Surface: Friction Surface
Compound: SBR
Work Tension: 140 lbs./PIW
Elongation: Less than 2%
Weight: 0.089 lbs./PIW

Minimum Pulley: 6"
Backflex Min. Pulley Dia.: 9"
Working Temp: -40 to 250 °F
Max. Stocked Width: 48"

Features

4-3004 incorporates 4 plies of heavy-duty cotton bonded with thick rubber skims to create a robust, non-marking belt. The tan rubber cover provides additional wear life and traction.

The belt offers higher load capacity and improved stiffness compared to 3-ply constructions while still maintaining good tracking and splice reliability.
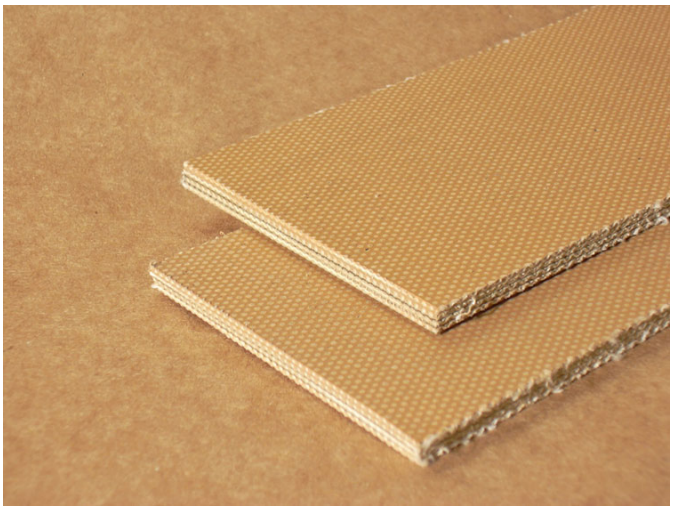
4 Ply Tan Transmission HD is widely used in feed and grain facilities for general-purpose conveyors, light-duty bucket elevators, and traditional power-transmission applications.