(800) 253-6300
sales@mulhernbelting.com
www.mulhernbelting.com

6-1820: PT-18/20

Color: Green
Plies: 2
Nom. OAG: 0.08" +/- 0.01"
Fabric: Polyamide
Top Surface: Green Rough Texture
Bottom Surface: Yellow Rough Texture
Compound: NBR
Work Tension: 43 lbs./PIW
Elongation: Less than 1%
Weight: 0.037 lbs./PIW

Minimum Pulley: 2.4"
Backflex Min. Pulley Dia.: 3.6"
Working Temp: -4 to 212 °F
Attributes: Anti-Static, Abrasion Resistant

Features

6-1820 uses an abrasion-resistant compound designed for long life in demanding converting and folding applications. The construction provides stable tracking, low stretch, and consistent performance under repetitive cycling.

The belt’s structure maintains uniform motion through tight-radius transitions, making it effective for processes requiring precise feeding, folding, or continuous pulling force.
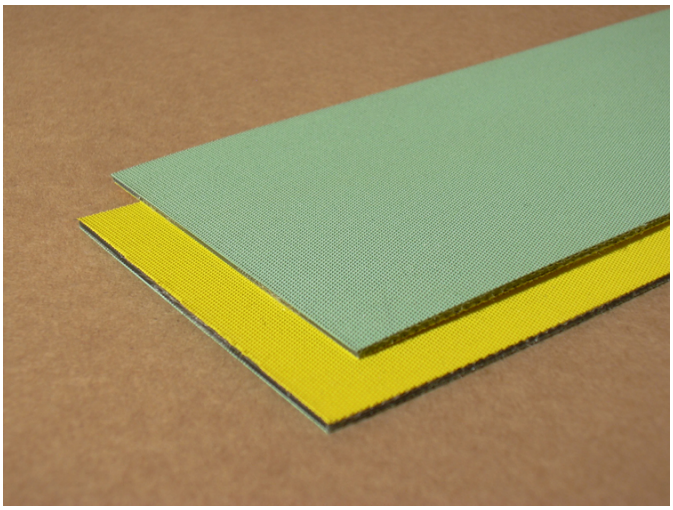
6-1820 is used extensively in paper converting, folder-gluer equipment, box-making, and yarn-processing lines where durability and reliability are essential to maintaining production flow.